


Description

The **FDESF101** conventional siren with a neat design enriches the range of conventional Teledata devices. Maximum performance managed by a microprocessor, 12 LEDs for excellent performance, 4 different shades, 0.5Hz and 1Hz option, deep base lockable on the siren body, fire-resistant case

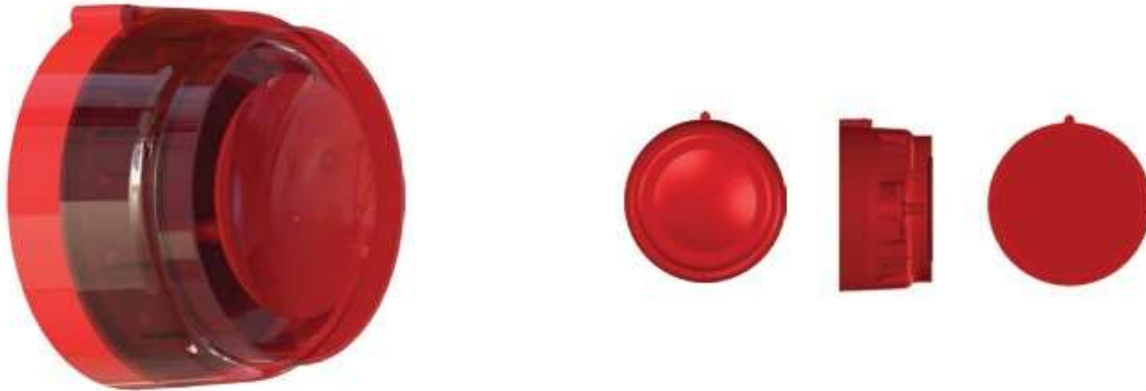

Technical Specifications

Rated supply voltage	24V DC
Alarm consumption @ 24Vdc	<30.1mA
Sound power	98dB
Number of programmable tones	4
Frequencies	600-2800Hz
Flashing light frequency	1Hz
Flashing light colour	red
Humidity	5% -95%
Operating temperature	-10 °C +55 °C
Case material red	ABS
Protection class	IP65