


Description

The conventional siren **FDESF101** offers maximum performance managed by a microprocessor, equipped with 12 LEDs, 4 different sound tones, option 0.5Hz and 1Hz, EN54-3 certified, equipped with a deep base and lockable with the siren body.

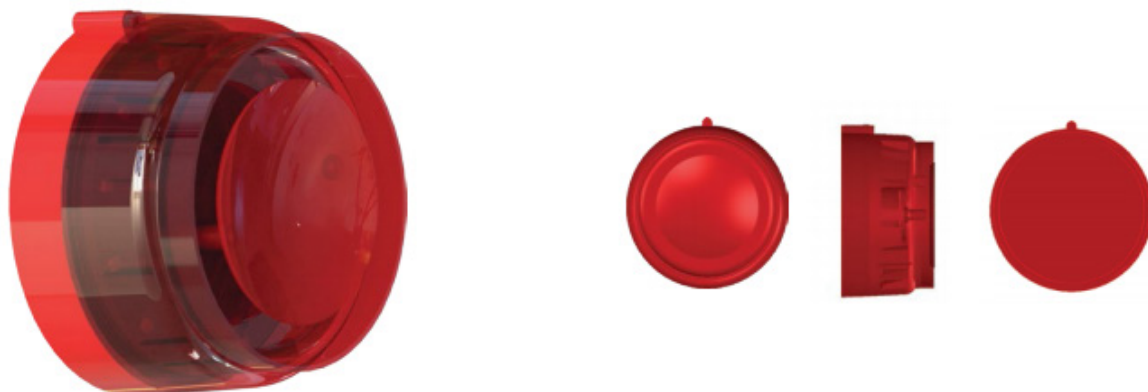

Technical Specifications

Supply voltage	24V DC
Current consumption in alarm	<30.1mA
Sound power	98dB
Number of tones	4
Frequency range	600-2800Hz
Flashing frequency	1Hz
Flashing colour	red
Humidity	5% -95%
Working temperature	-10 °C +55 °C
Dimensions	100mm (diameter) x 91mm (height)
Material	ABS
Degree of protection	IP65