


Description

The conventional siren **FDESF102** offers maximum performance managed by a microprocessor, equipped with high power LED, 32 different sound tones, 3 sound level, option 0.5Hz and 1Hz, EN54-3 and EN54-23 certified, equipped with a deep base and lockable with the siren body, fire resistant housing.

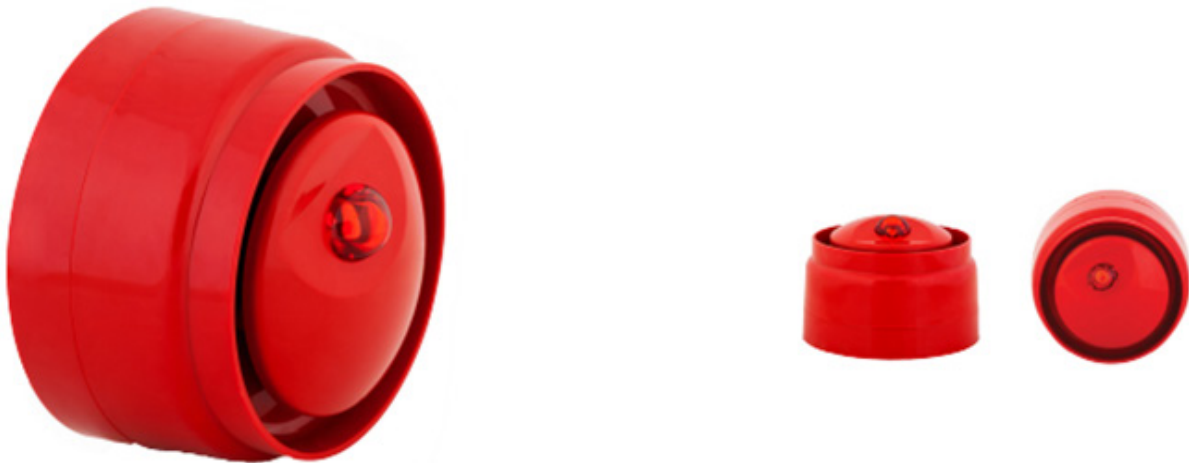

Technical Specifications

Supply voltage	24V DC
Current consumption in alarm @0,5Hz	<37.7 mA
Current consumption in alarm @1Hz	<61.3 mA
Sound power	98dB
Number of tones	32
Frequency range	440-2900Hz
Flashing frequency	0,5Hz - 1Hz
Flashing colour	red
Coverage	w 2,4-7,5 (13,5m)
Humidity	5% -95%
Working temperature	-10 °C +55 °C
Dimensions	100mm (diameter) x 110mm (height)
Material	High impact ABS
Degree of protection	IP65

