


Description

ONECONNECT has two main features:

- ETHERNET / Serial converter
- Modbus gateway

The first one is the basic functionality for centralization on Teledata supervision system.

The second feature is more advanced, through which the device is able to connect to the Teledata fire control panels (**TELEDATAONE** and **ONEMINI**) to the outside world through the REST protocols and Modbus.

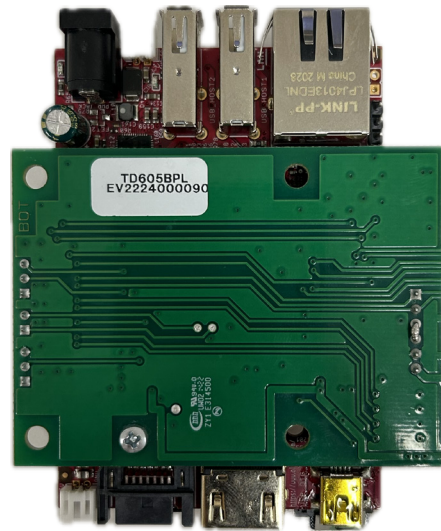

Technical features

Operating system	Embedded LINUX
CPU	ARM Cortex7
RAM	512 MB
Flash memory	8 gb
Operating temperature	from 5°C to 40°C
Dimensions	90 x 70 x 20 mm
CPU consumption	3 W