


## Description

Expansion card for TeledataOne fire control panel. It allows to connect up to 32 control panels in a ring network, allowing to share information and set crossed output activation.

The panel network created is fault tolerant and it supports the transfer of information among the nodes even if the central is operating in degraded mode.

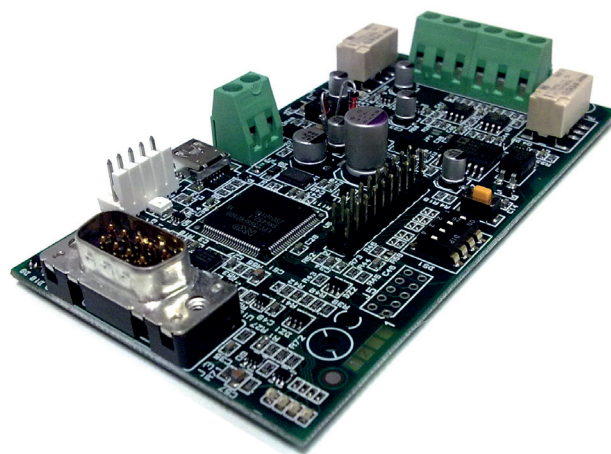

## Technical data

Dimensions	105 x 60 x 30 mm
Power supply	From Teledata One: 24 VDC From Olympia: 12 VDC
Stand by current	33 mA
Alarm current	33 mA
Distance between control panels	Up to 1000 m (cable for CAN dataline, bus RS485)
Speed of communication	Up to 50 Kbps
Connection	CAN bus
Installation	Inside the control panel on the mastercard
Compatible panels	TeledataOne, Olympia
Compliance	EN54-2