

Description


The **STW1000** Wireless Optical Smoke Detector is the latest in wireless smoke detector technology. The detector utilises dual optical smoke detection technologies and algorithms for improved performance, and maintaining the highest levels of false alarm rejection.

Utilising well-proven adaptive radio signal processing algorithms it ensures the highest levels of life safety and system reliability are achieved. In-built magnet test allows easy activation to verify correct functionality and response.

Key features

- Advanced dual optical chamber design
- Dual angle scattering analysis
- Advanced drift compensation
- Bi-directional wireless communication
- Can be used with Taurus addressable and conventional translators
- 22 pairs of field channels
- Dual channel redundancy
- 10 year battery life
- Utilises standard low-cost lithium battery technology
- Device identification tab
- Fast test feature for engineer testing
- Easy scan&link programming option
- Security screw to prevent tampering and unwanted removal
- 3rd party approved
- 5 year product warranty
- Tri-coloured LED

Technical information

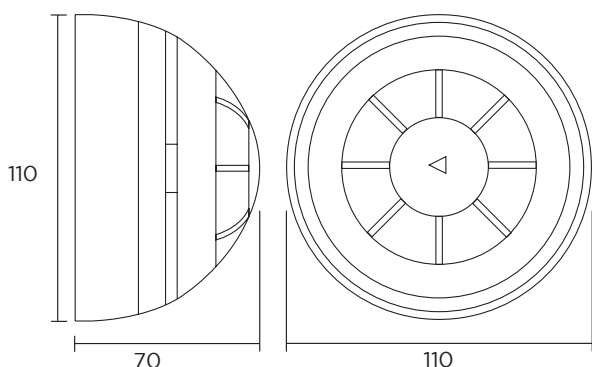

*Note: Approved range.

Certified device performance may vary depending on the approval body.



Technical specifications

Operating frequency range	868 - 870 MHz
Max radiated power	14dBm (25mW)
IP rating	40
Dimensions	110 mm x 70 mm
Weight (without batteries)	155g
Primary battery	2x CR123A
Operating Temperature	-10C to +55°C (no icing)

Standards & approvals

- EN54-7 Class P: Smoke detectors Point smoke detectors that operate using scattered light, transmitted light or ionization
- EN54-25: Components using radio links

Base compatibility

This device is supplied with a standard base and is compatible with the following sounder bases:

- **FDTWBS** Wireless Sounder Base
- **FDTWBSLW** Wireless Sounder Base + beacon white light
- **FDTWBSLR** Wireless Sounder Base + beacon red light