

# CERTIFICATE

## of constancy of performance

### 1922 - CPR - 1846

In compliance with Regulation (EU) 305/2011 of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

**Fire detection and fire alarm systems. Fire alarm devices. Sounders, model: FDES100, type A**

(with the performance listed, see Annex I to 1922-CPR-1846 that is an inseparable part of this certificate)

placed on the market under the name or trade mark of

**TELEDATA S.R.L**

**Via Giulietti 8, Milano 20132, Italy**

and produced in the manufacturing plant of

**Identification code 0001.**

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

**EN 54-3:2001, EN 54-3:2001/A1:2002, EN 54-3:2001/A2:2006**

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

This certificate was first issued on 02.09.2022 and will remain valid until 04.04.2027 as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body. The certificate is supported through annual surveillance audit and is reissued after each surveillance audit. The validity of the certificate may be confirmed in the CE register at the web address [www.dedal-bg.net](http://www.dedal-bg.net).



Issued:  
Burgas, 03 April 2026  
Ref. No. 05-00




Manager: *Banumba*  
dipl. eng. Anna Vasileva

## ANNEX I TO CERTIFICATE OF CONSTANCY OF PERFORMANCE 1922 - CPR - 1846/03.04.2026

Performance list, acc. to EN 54-3:2001, EN 54-3:2001/A1:2002, EN 54-3:2001/A2:2006

| Essential Characteristics                                                    | Performance | Clause |
|------------------------------------------------------------------------------|-------------|--------|
| <b>Performance parameters under fire conditions</b>                          |             |        |
| - Sound level                                                                | Pass        | 4.2    |
| - Frequencies and sound pattern                                              | Pass        | 4.3    |
| - Reproducibility                                                            | Pass        | 5.2    |
| - Operational performance                                                    | Pass        | 5.3    |
| - Attention drawing signal and message broadcast sequences                   | N/A         | C.3.1  |
| - Synchronisation                                                            | N/A         | C.3.2  |
| - Broadcast message performance                                              | N/A         | C.5.1  |
| - Attention drawing signal/silence/message sequence timing                   | N/A         | C.5.2  |
| - Message synchronization testing                                            | N/A         | C.5.3  |
| <b>Operational reliability</b>                                               |             |        |
| - Durability                                                                 | Pass        | 4.4    |
| - Construction                                                               | Pass        | 4.5    |
| - Marking and data                                                           | Pass        | 4.6    |
| - Durability                                                                 | Pass        | 5.4    |
| - General testing                                                            | N/A         | C.4    |
| <b>Durability of operational reliability, temperature resistance</b>         |             |        |
| - Dry heat (operational)                                                     | Pass        | 5.5    |
| - Dry heat (endurance)                                                       | N/A         | 5.6    |
| - Cold (operational)                                                         | Pass        | 5.7    |
| - Damp heat, cyclic (operational)                                            | Pass        | 5.8    |
| - Damp heat, steady state (endurance)                                        | Pass        | 5.9    |
| <b>Durability of operational reliability, humidity resistance</b>            |             |        |
| - Damp heat, cyclic (operational)                                            | Pass        | 5.8    |
| - Damp heat, steady state (endurance)                                        | Pass        | 5.9    |
| - Damp heat, cyclic (endurance)                                              | N/A         | 5.10   |
| <b>Durability of operational reliability, corrosion resistance</b>           |             |        |
| - Sulphur dioxide (SO <sub>2</sub> ) corrosion (endurance)                   | Pass        | 5.11   |
| <b>Durability of operational reliability, shock and vibration resistance</b> |             |        |
| - Shock (operational)                                                        | Pass        | 5.12   |
| - Impact (operational)                                                       | Pass        | 5.13   |
| - Vibration, sinusoidal (operational)                                        | Pass        | 5.14   |
| - Vibration, sinusoidal (endurance)                                          | Pass        | 5.15   |
| <b>Durability, electrical stability</b>                                      |             |        |
| - Electromagnetic compatibility (EMC), immunity (operational)                | Pass        | 5.16   |
| <b>Durability of operational reliability, resistance to ingress</b>          |             |        |
| - Enclosure protection                                                       | Pass        | 5.17   |

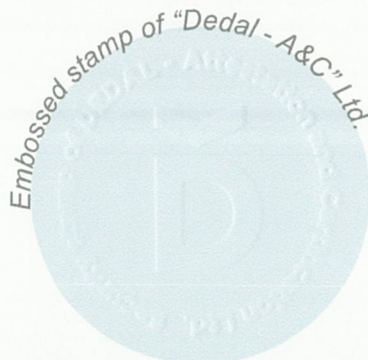

Issued:  
Burgas, 03 April 2026  
Ref. No. 05-00



Manager:

*Anna Vasileva*

dipl. eng. Anna Vasileva