

Description

The **FDTWCP** Wireless Manual Call Point (MCP) is a fully intelligent device which is compatible with all Taurus Translator and Expander Modules. The unit has a resettable plastic element, which displays a drop down warning indicator when operated. A key is supplied with the MCP for reset and case opening. The product is powered by two lithium CR123A batteries with a typical life of 10 years. A transparent cover protects against accidental operation, whilst a weatherproof enclosure is available for use outdoors or in hostile environments.




Main features

- Bi-directional wireless communication
- Can be used with Taurus addressable and conventional translators
- 22 pairs of field channels
- Dual channel redundancy
- Long communication range (1 km in open air)
- 10 year battery life
- Utilises standard low-cost lithium battery technology
- Resettable element
- Easy scan&link programming option
- 3rd party approved
- 5 year product warranty

Technical Specifications

Operating frequency range	868 - 870 MHz
Max radiated power	14dBm (25mW)
Dimensioni	88 mm x 87 mm x 61 mm
Weight (without batteries)	160 g
Batteries	2xCR123A (3 V & 1.2 Ah)
Operating temperature	-10°C to +55°C
Maximum humidity (non condensing)	95% RH
IP rating	42

Technical Information

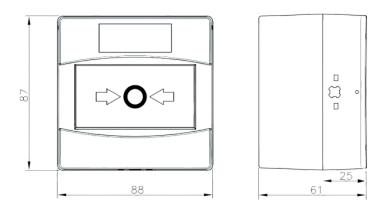

Standards and approvals

EN 54-11: Manual call points EN 54-25: Components using radio links

*Note: Approved range.

The performance of the certified device may vary depending on the approval body.

Teledata